


MIXER

LM1202FX

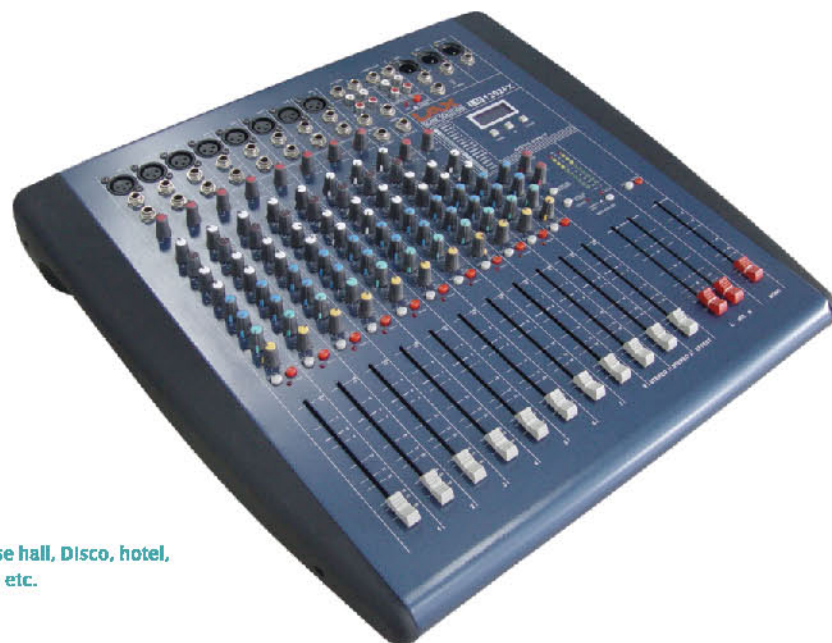

12-Channel Mixer

Applications

- Auditorium, conference, multipurpose hall, Disco, hotel,
- public address, broadcasting station, etc.

Features

- 8 Mono+2 Stereo Input
- LR + Mono Output
- SMT Technology applied in circuit board, ensuring high stability and reliability.
- 100mm ALPS highly precise fader
- Solo system, independent channel monitor
- +48V Phantom power
- 3 bands EQ, Mid frequency 140Hz-3KHz sweeping, good tune on human voice.
- Built in DSP, 16 high precision effects.

Specifications

Input	8xMono, 2xStereo
Output	L, R, MONO, AUX x 2
Processor	Built in 16 DSP effects
Max. Gain	≤60dB
Max. Line Gain	≥25dB
Rated Gain	Line 24dB Mic 62dB
Frequency Response	20Hz-20kHz ±0.5dB
THD+N	≤0.05%
Channel Fading Rate	≥80dB
Channel Gain Rate	±0.5dB
Channel Phase Rate	±0.1°
Input Impedance	Cable:10KΩ Mic 2.4KΩ
Input Overload Voltage	16dBm
Output Impedance	≤75Ω
Max. Output Gain	21 dB
Power Consumption	≤20W

POWER AMPLIFIER AND DIGITAL PROCESSOR COLLECTION



MA-AN Series
Amplifier

MA Series
Amplifier

D Series
Amplifier

CT Series
Amplifier

MPA Series
6 channel Amplifier

DSP Series
Digital Processor

PSC801B

LAX
OLYMPIC Series
www.lax-pro.com